




PERFORMANCE CURVES L70W6

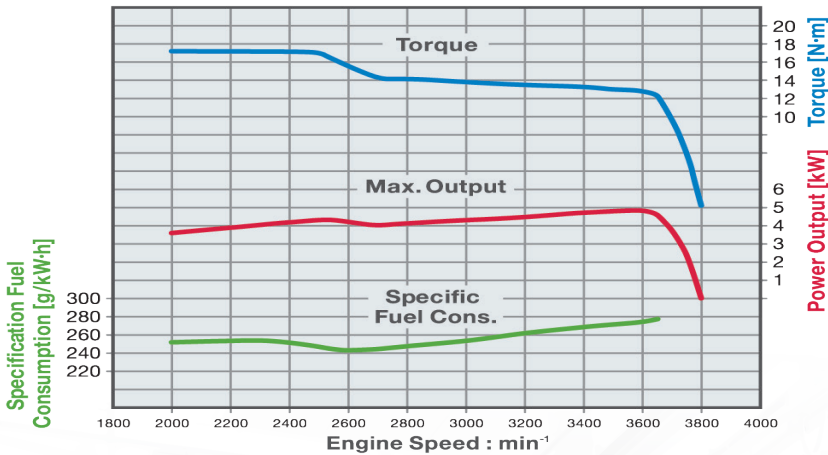

SPECIFICATION	LW
CYLINDERS	1
BORE X STROKE (mm)	78 x 67
DISPLACEMENT (L / ci)	0.32 / 19.52
GROSS POWER hp (kw)	6.5 (4.8)
RATED SPEED (rpm)	3600
LENGTH (in/mm)	15.5 / 395
WIDTH (in/mm)	17.6 / 448
HEIGHT (in/mm)	18.5 / 472
DRY WEIGHT ELECTRIC START (LBS/KG)	~95 / 43
DRY WEIGHT RECOIL START (LBS/KG)	~84 / 38
COMBUSTION TYPE	Direct Injection
ASPIRATION	Natural Aspiration
GOVERNOR TYPE	Mechanical

KEY FEATURES

- Dimensionally a drop-fit replacement for YANMAR LN & LV Series Engines.
- Reduces exhaust emissions using Diesel Oxidation Catalyst.
- Lightweight, compact solution to power many applications
- Variable speed engine meeting EPA Tier IV Final
- Samples and mass production are available now.



Pure. Reliable. Power.