




RATED POWER Potencia Nominal	26.1 hp 19.4 kW
RATED SPEED Velocidad de Regimen	3600 RPM

3TNV76-HGE

Dimensions & Performance Data & Quick Specs	Length / Longitud	
	Length / Longitud	22.32 in (567 mm)
	Width / Ancho	
	Width / Ancho	16.93 in (430 mm)
	Height / Altura	
Height / Altura	23.66 in (601 mm)	
Dry Weight / Peso en seco		
Dry Weight / Peso en seco	271 lbs / 124 kg	

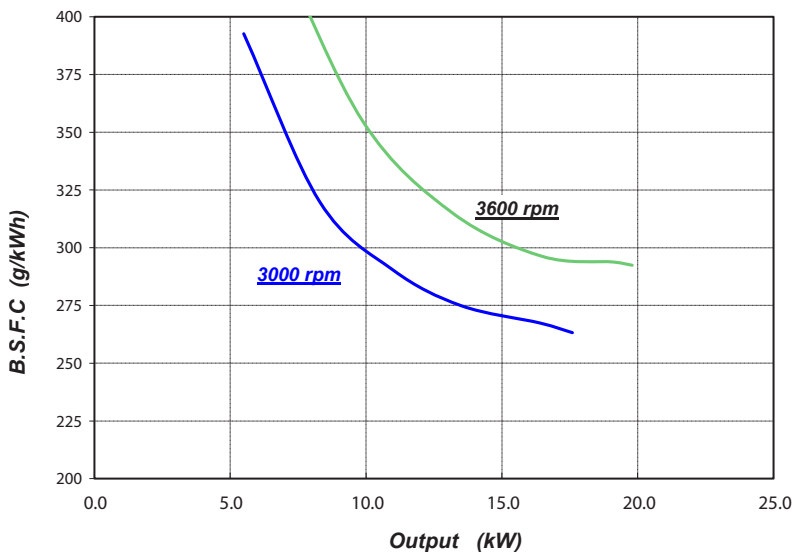

SPECIFICATION Especificacion	HGE
CYLINDERS Cilindros	3
BORE X STROKE Diámetro x Carrera	3.0 X 3.2 (in) 76 X 82 (mm)
DISPLACEMENT Cilindrada	68.1 (ci) 1116 (cc)
COMBUSTION TYPE Tipo de Combustion	Indirect Injection Inyeccion Indirecta
ASPIRATION Aspiracion	Naturally Aspirated Aspiracion Natural
GOVERNOR TYPE Tipo de Gobernador	Mechanical Mecanico



Reliable & Durable

The TNV engines now proudly take up the running as Yanmar's premium small industrial diesel. They offer even more enhanced durability due to better block cooling, a stiffer crank and pistons, finer tolerance in the journal and more. CAE analysis has brought lower vibrations and higher strength to the mounting structure for even better reliability in heavy-duty jobs.



Clean Emissions

Building off the proven TNE design, Yanmar has achieved superior exhaust emissions by improving the combustion chamber and fuel injection equipment design. Engines are compliant with 2008 EPA Interim Tier 4 and EU stage III A exhaust emissions regulations.



Fuel Delivery and Economy

A newly designed, in-line ML fuel injection pump is utilized to assure more precise fuel delivery and control. The result is reduced emissions, improved performance over a wide range of applications and increased fuel economy which assures that Yanmar's reputation for superior starting characteristics continues.

Lubrication System

4.4L Capacity Deep Oil Pan

Electrical System

12V, 40 Amp Alternator

Fuel System

In-line ML Fuel Injection Pump

Cooling System

Water Pump, Belt Driven

Power Take Off

FWH-SAE #5
FW-SAE 7.5" CMP